

AIR-POWERED PAINT SUPPLY PUMP

塗料循環輸送泵浦




CTP-7M-4:1(107-004)

功
能

中高粘度塗料的大型循環供給系統

MEDIUM-HIGH VISCOSIMETER PAINT LARGE TYPE OF
CIRCULATING SUPPLY SYSTEMS

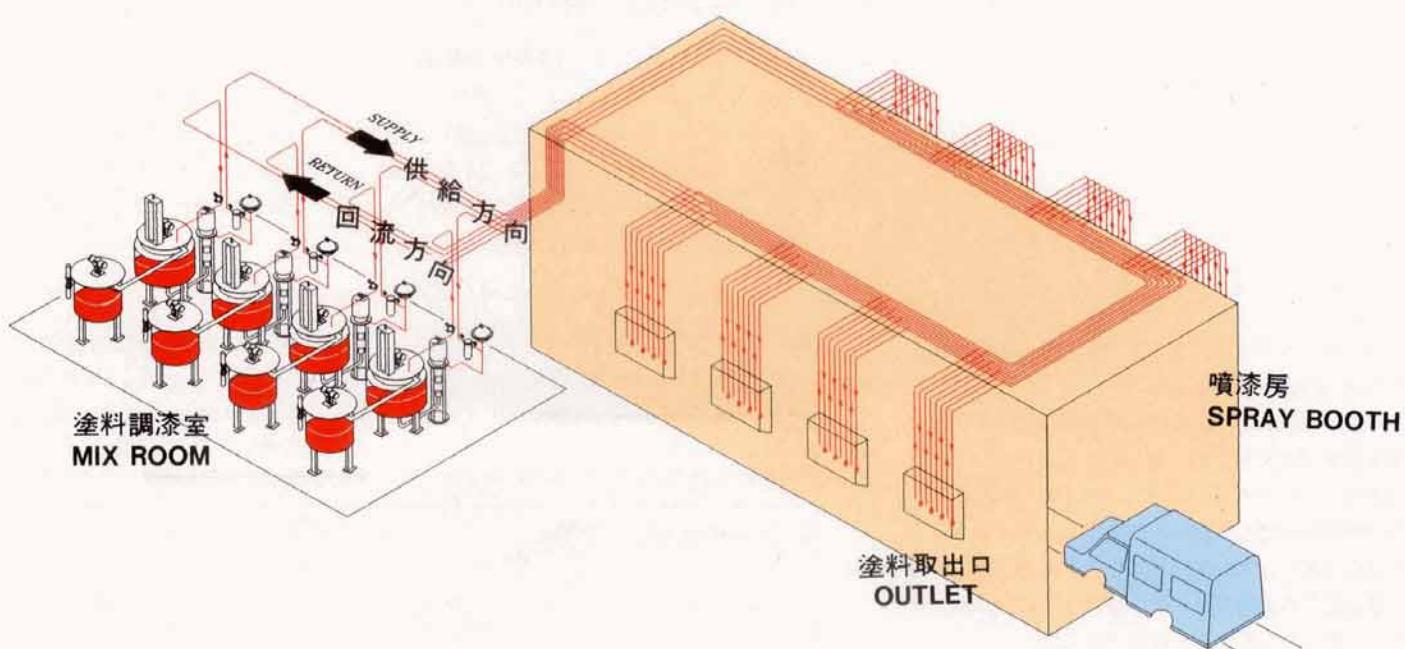


AIR-POWERED PAINT SUPPLY PUMP

塗料循環輸送泵浦



CTP-6M-3:1(106-001)

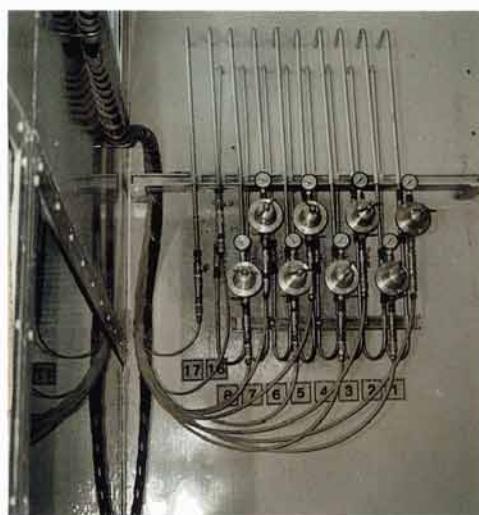

FLUID OUTLET PAINT REGULATOR
塗料取出口穩壓器 (270-050)

適用：

使用於供給一般性塗料，中、高粘度樹脂，噴漆、樹脂輸送長距離配管(BOTH)的場合，氣動式安全性高，使用壽命長。

壁架或腳架是使用吸料管插入各式塗料桶內吸取塗料再壓送的場合。

55 Gall Drum型是直接放在55 Gall桶上吸入塗料，使用時配合油漆攪拌器，泵浦固定桶蓋，氣動昇降氣缸成一完整組合直接輸送塗料使用。

特點：

- 塗料大量供給多隻噴漆槍所需的吐出量。
- 中央塗料循環輸送

長距離配管至多處噴塗室(Booth)，供給各站所需塗料，操作時間縮短，節省人工、成本。

- 塗料集中管理，控制品質。

APPLICATION:

For transporting and delivering of the general coatings, medium and high, viscosity resins, spray paint, the pneumatic device is safe and long life.
The wall rack or the stand inserts directly into the paint drum to suck and deliver the paint.

The 55 Gall Drum model insert the duct directly into the 55 Gall Drum to suck the paint.

It is used with the paint mixer, the pump fixing drum cover, the pneumatic cylinder as the complete set to directly pump the paint.

FEATURES:

- High delivery paint suppling

The high value paint outlet can be used for many spray guns working in the same time.

- Center control circulating

Suitable for long distance suppling pipe, suppling the paint to many spray boathes, shorten the working hours, save much money and labor.

CTP-6M-3 : 1 (106-001)

Fluid pressure ratio: 3 : 1 (壓力比)

Delivery: 0 ~ 36.5 ℥/min (吐出量)

Maximum outlet pressure: 21 kg/cm²

Air motor effective diameter: 153 mm ϕ

Air motor stroke: 100 mm

Air motor speed: 0 ~ 60 cycles/min

Air inlet: 1/2" PT

Fluid outlet: 1" PT

Fluid inlet: 1-1/2" PT

CTP-7M-4 : 1 (107-004)

Fluid pressure ratio: 4 : 1 (壓力比)

Delivery: 0 ~ 90.8 ℥/min (吐出量)

Maximum outlet pressure: 28 kg/cm²

Air motor effective diameter: 178 mm ϕ

Air motor stroke: 120 mm

Air motor speed: 0 ~ 60 cycles/min

Air inlet: 1/2" PT

Fluid outlet: 1" PT

Fluid inlet: 1-1/2" PT

技術・效率・品質・服務

春泰機械工程有限公司成立於民國62年，從事各種塗裝設備之生產研究開發業務：

經不斷的努力與研究，至今已能生產精密的自動化靜電噴漆機器及塗裝設備，傳統的空氣式(AIRSPRAY)混氣式(AIR MIX)和無氣式(AIRLESS)輸送泵浦，其他相關設備如水洗式NO PUMP噴漆房，手持靜電塗裝機等等，在功能及品質方面皆媲美進口貨，本公司除製造及售後服務外，亦作整套最新塗裝設施之規劃，設計及施工等業務，歡迎各界洽詢。



春泰機械工程有限公司
Fuspec Taiwan Pty., Ltd.

桃園縣龜山鄉忠義路2段260巷65號
No. 65, Lane. 260, Sec. 2, Jhong Yi Rd.,
Guei Shan Town, Taoyuan 333, Taiwan
TEL: +886 3 3185977 FAX: +886 3 3185978
E-mail:fpec@ms22.hinet.net